



OIL & GAS SOLUTIONS

OIL FLOODED AIR COMPRESSORS

Single-Stage

Flow: .36 – 45.7 m³/min (13 – 1615 cfm)

Power: 4 – 261 kW (5 – 350 hp)

Pressure: 7 – 13.8 bar (100 – 200 psi)

Variable Speed Drive (VSD) and Spiral Valve models available.





Two-Stage

Flow: 14.2 - 84.9 m³/min (500 – 3000 cfm)

Power: 112 – 450 kW (150 - 600 hp)

Pressure: 7 – 24.1 bar (100 – 350 psi)

Variable Speed Drive (VSD) and Spiral Valve models available.

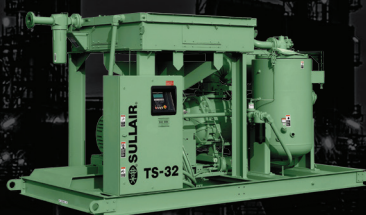

SCAN TO
LEARN MORE

PORTABLE AIR COMPRESSORS

Portable

Flow: 5.2 – 45.3 m³/min (185 – 1600 cfm)

Power: 36.5 – 522 kW (49 – 700 hp)

Pressure: 5.2 – 34.5 bar (75 – 500 psi)

Multiple emissions level options available.



OIL FREE AIR COMPRESSORS

Scroll

Flow: .16 – 3.7 m³/min (6 – 129 cfm)

Power: 1.5 – 33 kW (2 – 44 hp)

Pressure: 8.3 – 10 bar (120 – 145 psi)



Oil Free Rotary Screw

Flow: 3.3 – 36.9 m³/min (117 – 1303 cfm)

Power: 22 – 240 kW (30 – 300 hp)

Pressure: 7 – 10.3 bar (100 – 150 psi)



OEM

Gas Compression

Flow: 2 – 100 m³/min (72 – 3527 cfm)

Pressure: 7 – 34.5 bar (100 – 500 psi)



Vapor Recovery

Flow: .01 – .13 m³/min (.1 – 4.75 cfm)

Pressure: 7 – 34.5 bar (100 – 500 psi)



Drill Compressor Kits

Flow: 3.1 – 51 m³/min (110 – 1800 cfm)

Pressure: 7 – 34.5 bar (100 – 500 psi)

