HITACHI

SULLAIR

OIL & GAS SOLUTIONS


OIL FREE COMPRESSORS

Flow: 6-118,000 cfm (.16 – 3341 m³/min)
Power: 2-30,000 hp (1.5 – 22370 kW)
Pressure: 100-725 psi (7 – 50 bar)











OEM


Gas Compression

Flow: 72 – 3527 cfm (2 – 100 m³/min)
Pressure: 100 – 500 psi (7 – 34.5 bar)



Vapor Recovery

Flow: .1 – 4.75 cfm (.01 – .13 m³/min)
Pressure: 100 – 500 psi (7 – 34.5 bar)

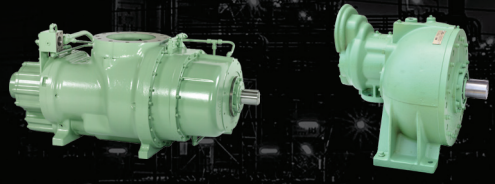

Drill Compressor Kits

Flow: 110 – 3600 cfm (.31 to 102 m³/min)
Pressure: 100 – 500 psi (7 – 34.5 bar)



Hitachi Global Air Power

OIL FLOODED COMPRESSORS

Flow: 13 – 3000 cfm (.36 – 84.9 m³/min)

Power: 5 – 600 hp (4 – 450 kW)

Pressure: 100 – 500 psi (7 – 34.5 bar)







COMPRESSOR PACKAGES

COMPRESSOR SKIDS/INSTRUMENT AIR SKIDS



COMPLETE COMPRESSOR CONTAINERS



Insulated Enclosures



Complete Insulated Buildings

PORTABLE COMPRESSORS

DIESEL AND ELECTRIC OPTIONS AVAILABLE

Flow: 185 – 1600 cfm (5.24 – 45.31 m³/min)

Power: 49 – 630 hp (36.5 – 470 kW)

Pressure: 100 – 500 psi (6.9 – 34.4 bar)









SCAN TO LEARN MORE

Hitachi Global Air Power US, LLC

HitachiGlobalAirPower.com/PumpTurbo

©2026 Hitachi Global Air Power US, LLC. All rights reserved. Specifications including appearance subject to change without notice. OILANDGASLINE202609-1
The Sullair symbol and Sullair wordmark are registered trademarks of Hitachi Global Air Power US, LLC.